



■ Description

High cost performance, designed with open circuit, short circuit overload, and overtemperature protection. Meets Class II requirements. Warranty is 5 years.



■ Input

Items	Conditions	Request	Note
Input voltage	Ta	100-240Vac	-
Input frequency		50Jz/60Hz	-
Input current	25°C, rated input voltage, output with max. rated power	<1.3A	-
Input power		<114W	-
Efficiency		≥ 89%	-
Standby	25°C, rated input voltage, output without load	<0.5W	Average
Inrush current	25°C, rated input volatage	<75A	Peak
PF	25°C, rated input voltage, output max. rated power	≥ 0.9	-

■ Output

Items	Conditions	Request	Note
Startup time	25°C, rated input voltage output with max. rated power	<0.5S	230Vac, 50Hz
Output voltage and precision	Ta, rated input voltage, output with max. rated power	65V± 5%	<13V
Output current range	Ta, rated input voltage, output with max. rated power	0-8.33A	-
Output voltage wave	25°C, rated input voltage output with max. rated power	<500mV	Vp-p
Output overload	25°C, rated input voltage output with max. rated power	Yes	-
Output current and precision	Ta, rated input voltage, output with max. rated power	-	-
Rated output voltage range	Ta, rated input voltage, output with max. rated power	-	-
Output current wave	25°C, rated input voltage, output max. rated power	-	-
Dimming mode	-	-	Lp-p
Dimming range	-	-	-

■ Temperate and others

Items	Conditions	Request	Note
Operation temp.	-	-20-45°C	-
Relative humidity	-	45%-85%	-
Max. case temp.	-	90°C	-
Lifetime	Max. Ta, rated input voltage output with max. rated power	30,000hr	-
Working noise	25°C, rated input voltage output with rated power, mute box background noise < 30dB, pickup 10cm distance from products	< 35dB	-

■ Mechanical, mounting

Items	Conditions
Case material and size	Plastic case
Mounting ways	Independent
Insulation type	Class II
IP grade	IP20
Input cables dimension	Terminal
Output cables dimension	Terminal
Output cables length	Max 2M


■ Protection

Items	Conditions	Request	Note
Open circuit	Ta, rated input voltage, no load	-	-
Over load	Ta, 0.94-1.06 times of input voltage, 1.4 times of rated	Yes	-
Short circuit	Ta, 0.94-1.06 times of input voltage	Yes	-
Over temperature	Ta, 0.94-1.06 times of input voltage, temperature detected point more than 115 degree	Yes	-
Over voltage	Ta, 0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one	Yes	-
Auto recovery	Over load, short circuit revocation	Yes	-
Latch off	Over voltage, over heat re-start after cut off	Yes	-

■ **Standard**

Items	Conditions
Safety	IEC61347-1, IEC61347-2-13 (Combine with light IEC60598)
Harmonic	IEC61000-3-2
EMI	IEC55015
EMS	IEC61547

■ **Mechanical Specification(Unit: mm)**

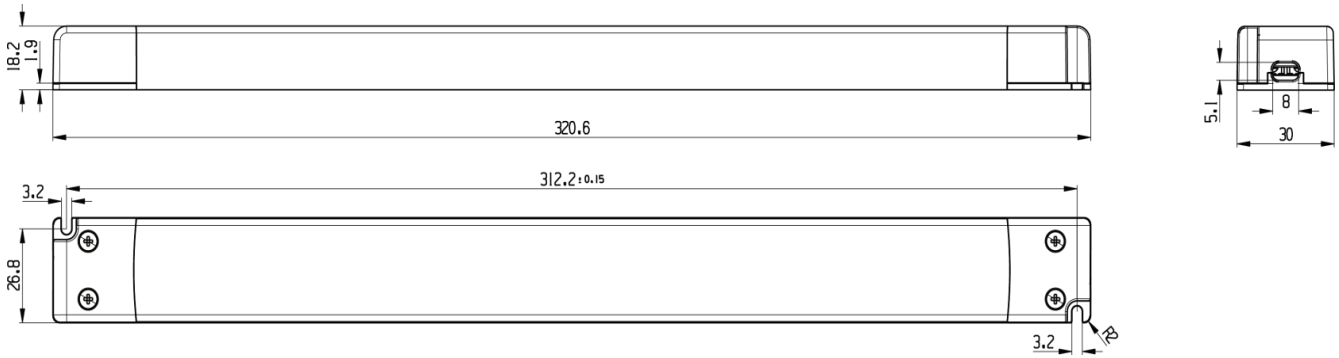

■ **Wiring Diagram**

